

OK-10CP Rotary Heat Transfer Machine

For cut parts or roll to roll



- Suited for transfer printing, dye sublimation, fixation, narrow web/lanyards.
- 48"/66" printable width and 10" diameter drum for faster production.
- Digital temperature control, dwell timer and automatic belt tracking.
- Oil filled drum makes colors consistent from side to side and job to job.

- Ribbons and lanyards
- Soft signage
- Banners and flags
- Skis / surfboards / snowboards
- Athletic wear
- Exhibits
- Mousepads
- Textile products
- Table drapes

OK-10CP Rotary Heat Transfer Machine



The Practix OK-10CP is available in 48" or 66" wide printable width. The oil filled heated is 10" in diameter and 240 degrees of wrap achieving faster production speed than most comparable models. This model can be used for transferring on continuous or roll materials, printed paper with cut panels or piece goods. The machine has the ability for production to use either of the three systems independently.

Maximum productivity

- 48" or 66" printable width
- 10" diameter drum makes the OK-10 the fastest drum machine of its size for the digital market with 240 degrees/21" of production contact
- Oil filled, steel encased drum design with a state of the art temperature controller allows for temperature accuracy and makes colors consistent from side to side and job to job
- Automatic belt tracking ensuring no lateral movement or ghosting on your fabrics
- Heavy duty, all steel unitized frame
- 100% Nomex felt belt

Key features...

- Digital temperature controller with PID and autotune.
- Digital speed controller
- 2 unwinds / 2 rewinds with independent pneumatic adjusting for more tension or brake
- 1 unwind / 1 rewind to utilize tissue paper for protection of the belt for cut parts or mesh fabric
- 3" chucks for all unwind and rewind shafts
- Safety system (emergency stops and hand protection at entry)
- Reversing capability
- Automatic cool down

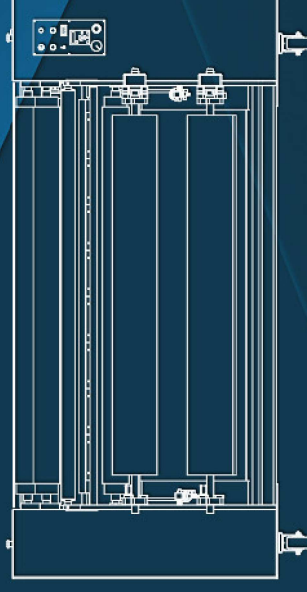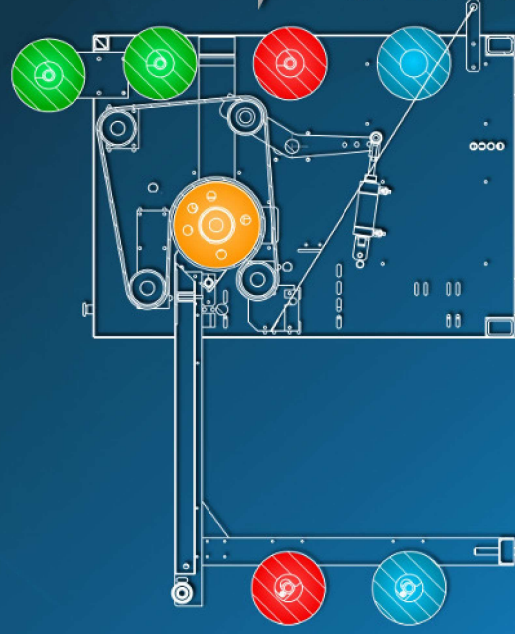

SPECIFICATIONS...

Belt Width	48" (1,2 meters)	66" (1,6 meters)
Power Req'd	12,5 kW	14 kW
Max. Temp.	450°F (240°C)	450°F (240°C)
App. Weight	1700 lb (770kg)	2000 lb (1050kg)
Air Supply	100 PSI (.75CFM)	100 PSI (.75CFM)
Dimensions	63" x 98" x 51"	68" x 110" x 51"

